

## Test Summary KATUN STANDARD LIFE DRUM TEST

Test Designator: **HP LJ-1010**  
 DRUM: **KATUN STANDARD LIFE**  
 TONER: **KATUN PERFORMANCE**  
 PURPOSE: **SYSTEM TEST**  
 KATUN DRUM P/N: **35157**

DATE: **3/6/2008**  
 TEMP: **23°C**  
 RH: **50± 5**  
 PRINTER: **HEWLETT PACKARD LJ-1010**  
 CARTRIDGE: **OEM - Once Used**

### Image Quality

Section Averages	Density	Background	Character Quality	Vertical Res.	Horizontal Res.
OEM N/N	1.49	0.040%	8.2	62.0	55.5
Test N/N	1.44	0.038%	8.5	68.0	61.5


### Toner Consumption

Test Section	Toner Consumed (g)	Toner mg/copy	Toner Transferred (g)	%Transfer	%Waste	Waste Toner (g)	Copies per Ctg./Btl.	Copies in Section
OEM N/N	91.2	30.4	81	88.8%	11.2%	10.2	2632	3000
Test N/N	111	37	84.8	76.4%	23.6%	26.2	2703	3000


### OPC Coating Loss

Drum Type	Drum Serial #	Total Copies Run	Coating Thickness at Install	Coating Thickness at End	Total Coating Loss	Loss Per 1K copies	Failure mode
OEM N/N	n/a	3,000	35.7	33	2.7	0.900	End of Test
Test N/N	n/a	3,000	33.3	30.2	3.1	1.033	End of Test

### Black Page Image Density

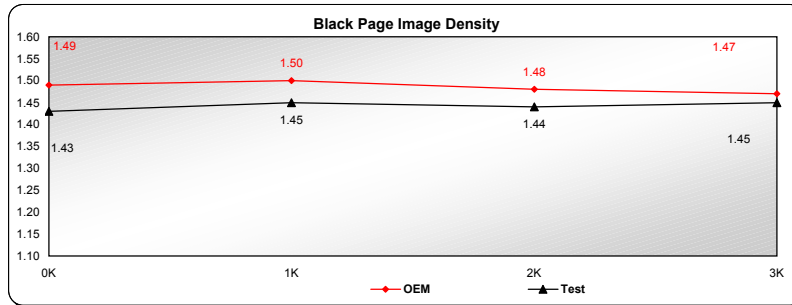

### Halftone Reproductions

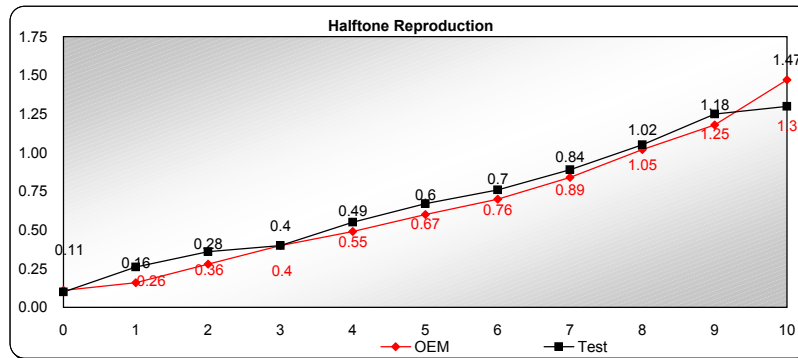

### Background

